

**OSHA's
Respiratory Protection Standard
29 CFR 1910.134**



This program is intended to be a resource for instructors of occupational safety and health and is not a substitute for any of the provisions of the Occupational Safety and Health Act of 1970 or for any standards issued by the U.S. Department of Labor's Occupational Safety and Health Administration (OSHA).

OSHA's Office of Training and Education wishes to acknowledge 3M Occupational Health and Safety Division, MSA, North Safety Products and TSI for contributing some of the graphics used in this program. Appearance of their products does not imply endorsement by the U.S. Department of Labor.

Scope

This standard applies to:

-  General Industry (Part 1910),
-  Shipyards (Part 1915),
-  Marine Terminals (Part 1917),
-  Longshoring (Part 1918), and
-  Construction (Part 1926).

Organization of Standard

- (a) Permissible practice
- (b) Definitions
- (c) Respirator program
- (d) Selection of respirators
- (e) Medical evaluation
- (f) Fit testing
- (g) Use of respirators
- (h) Maintenance and care
- (i) Breathing air quality and use
- (j) Identification of filters, cartridges, and canisters
- (k) Training and information
- (l) Program evaluation
- (m) Recordkeeping
- (n) Dates
- (o) Appendices (mandatory)
 - A: Fit Testing Procedures
 - B-1: User Seal Checks
 - B-2: Cleaning Procedures
 - C: Medical Questionnaire
 - D: Information for Employees Wearing Respirators When Not Required Under the Standard

Permissible Practice

- ✎ The primary means to control occupational diseases caused by breathing contaminated air is through the use of **feasible engineering controls**, such as enclosures, confinement of operations, ventilation, or substitution of less toxic materials
- ✎ When effective engineering controls are not feasible, or while they are being instituted, appropriate respirators shall be used pursuant to this standard
- ✎ Employer shall provide respirators, when necessary, which are applicable and suitable for the purpose intended
- ✎ Employer shall be responsible for establishment and maintenance of a **respirator program** which includes the requirements of paragraph (c), *Respiratory protection program*

Employee Exposure

Exposure to a concentration of an airborne contaminant that would occur if the employee were **not** using respiratory protection.


Respiratory Inlet Covering

- ✎ That portion of a respirator that forms the protective barrier between the user's respiratory tract and an air-purifying device or breathing air source, or both
- ✎ May be a facepiece, helmet, hood, suit, or a mouthpiece respirator with nose clamp

Tight -Fitting Coverings



Quarter Mask

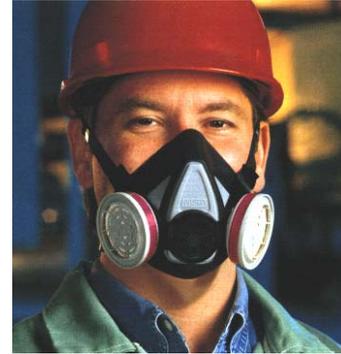

Half Mask



Full Facepiece



Mouthpiece/Nose Clamp
(no fit test required)


Loose-Fitting Coverings




Hood



Helmet

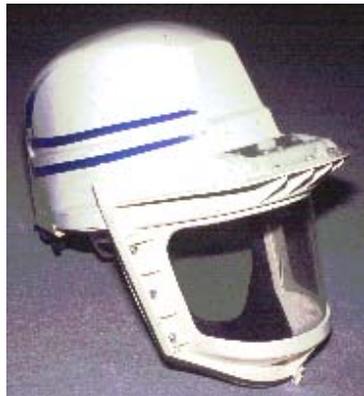

**Loose-Fitting
Facepiece**

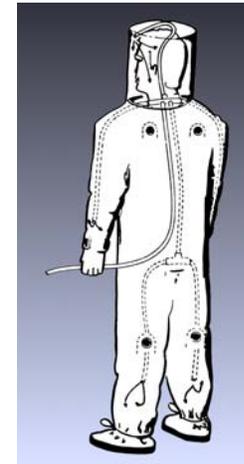

Full Body Suit

Filter

A component used in respirators to remove solid or liquid aerosols from the inspired air. Also called **air purifying element**.



Canister or Cartridge

A container with a filter, sorbent, or catalyst, or combination of these items, which removes specific contaminants from the air passed through the container.



Negative Pressure Respirator

A respirator in which the air pressure inside the facepiece is **negative during inhalation** with respect to the ambient air pressure outside the respirator.

Filtering Facepiece (Dust Mask)

A negative pressure particulate respirator with a filter as an integral part of the facepiece or with the entire facepiece composed of the filtering medium.



Air-Purifying Respirator (APR)

A respirator with an air-purifying filter, cartridge, or canister that removes specific air contaminants by passing ambient air through the air-purifying element.



Positive Pressure Respirator

A respirator in which the pressure inside the respiratory inlet covering exceeds the ambient air pressure outside the respirator.

Powered Air-Purifying Respirator (PAPR)

An air-purifying respirator that uses a blower to force the ambient air through air-purifying elements to the inlet covering.



Atmosphere-Supplying Respirator

- ✎ A respirator that supplies the user with breathing air from a source independent of the ambient atmosphere
- ✎ Includes supplied-air respirators (SARs) and self-contained breathing apparatus (SCBA) units

Classes of Atmosphere-Supplying Respirators

-  **Continuous Flow.** Provides a continuous flow of breathing air to the respiratory inlet covering
-  **Demand.** Admits breathing air to the facepiece only when a negative pressure is created inside the facepiece by inhalation
-  **Pressure Demand.** Admits breathing air to the facepiece when the positive pressure inside the facepiece is reduced by inhalation

Supplied Air Respirator (SAR)

An atmosphere-supplying respirator for which the source of breathing air is not designed to be carried by the user. Also called **airline respirator**.



Self-Contained Breathing Apparatus (SCBA)

An atmosphere-supplying respirator for which the breathing air source is designed to be carried by the user.



Escape-Only Respirator

A respirator intended to be used only for emergency exit.



Respirator Program

- ✎ Must develop a **written program** with **worksite-specific procedures** when respirators are necessary or required by the employer
- ✎ Must update program as necessary to reflect changes in workplace conditions that affect respirator use
- ✎ Must designate a **program administrator** who is qualified by appropriate training or experience to administer or oversee the program and conduct the required program evaluations
- ✎ Must provide respirators, training, and medical evaluations at no cost to the employee

Note: OSHA has prepared a *Small Entity Compliance Guide* that contains criteria for selection of a program administrator and a sample program.

Respirator Program (cont'd)

Where Respirator Use is Not Required

- ✎ Employer may provide respirators at employee's request or permit employees to use their own respirators, if employer determines that such use in itself will not create a hazard
- ✎ If voluntary use is permissible, employer must provide users with the information contained in Appendix D
- ✎ Must establish and implement those elements of a written program necessary to ensure that employee is **medically able to use the respirator** and that it is cleaned, stored, and maintained so it **does not present a health hazard** to the user


Exception: Employers are not required to include in a written program employees whose only use of respirators involves voluntary use of filtering facepieces (dust masks).

Respirator Program Elements

1. Selection
2. Medical evaluation
3. Fit testing
4. Use
5. Maintenance and care
6. Breathing air quality and use
7. Training
8. Program evaluation

Selection of Respirators

Employer must select and provide an appropriate respirator based on the respiratory hazards to which the worker is exposed and workplace and user factors that affect respirator performance and reliability.

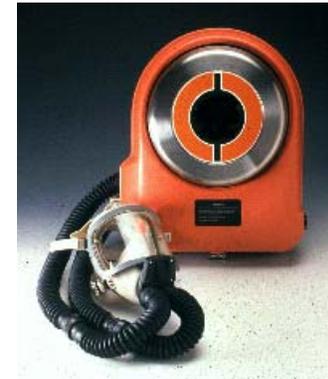

Selection of Respirators (cont'd)

-  Select a **NIOSH-certified respirator** that shall be used in compliance with the conditions of its certification
-  Identify and evaluate the respiratory hazards in the workplace, including a reasonable estimate of employee exposures and identification of the contaminant's chemical state and physical form
-  Where exposure cannot be identified or reasonably estimated, the atmosphere shall be considered **Immediately Dangerous to Life or Health (IDLH)**
-  Select respirators from a sufficient number of models and sizes so that the respirator is acceptable to, and correctly fits, the user

Immediately Dangerous to Life or Health (IDLH)

An atmosphere that poses an immediate threat to life, would cause irreversible adverse health effects, or would impair an individual's ability to escape from a dangerous atmosphere.

Oxygen Deficient Atmosphere

- ✎ An atmosphere with an oxygen content **below 19.5%** by volume
- ✎ All oxygen deficient atmospheres are considered IDLH

Respirators for IDLH Atmospheres



Full Facepiece Pressure Demand SCBA certified by NIOSH for a minimum service life of 30 minutes



Combination Full Facepiece Pressure Demand SAR with Auxiliary Self-Contained Air Supply

Respirators for IDLH Atmospheres (cont'd)

Respirators provided only for escape from IDLH atmospheres shall be NIOSH-certified for escape from the atmosphere in which they will be used.

Exception: Employers may use any atmosphere-supplying respirator, provided they can demonstrate, under all foreseeable conditions, that oxygen levels in the work area can be maintained within the ranges specified in Table II (i.e., between 19.5% and a lower value that corresponds to an altitude-adjusted oxygen partial pressure equivalent to 16% oxygen at sea level).

Assigned Protection Factor (APF)

The **workplace level** of respiratory protection that a respirator or class of respirators is expected to provide to employees when the employer implements a continuing, effective respiratory protection program as specified in this section.

Assigned Protection Factors (APF's)

- ✎ Must use the APF's listed in **Table 1** to select a respirator that meets or exceeds the required level of protection
- ✎ When using a **combination respirator** (e.g., airline with an air-purifying filter), must ensure that the APF is **appropriate to the mode of operation** in which the respirator is being used



TABLE 1 – ASSIGNED PROTECTION FACTORS⁵

Respirator Type ^{1, 2}	Quarter Mask	Half Mask	Full Face	Helmet/Hood	Loose-Fitting
Air Purifying	5	³ 10	50	-----	-----
PAPR	-----	50	1,000	⁴ 25/1,000	25
SAR					
 Demand	-----	10	50	-----	-----
 Continuous Flow	-----	50	1,000	⁴ 25/1,000	25
 Pressure Demand/ other (+) pressure	-----	50	1,000	-----	-----
SCBA					
 Demand	-----	10	50	50	-----
 Pressure Demand/ other (+) pressure	-----	-----	10,000	10,000	-----

¹May use respirators assigned for higher concentrations in lower concentrations or when required use is independent of concentration.

²These APF's are only effective when employer has a continuing, effective respirator program per 1910.134.

³This APF category includes filtering facepieces and elastomeric facepieces.

⁴Must have manufacturer test evidence to support an APF of 1,000 or else these respirators receive an APF of 25.

⁵These APFs do not apply to escape-only respirators. Escape respirators must conform to 1910.134(d)(2)(ii) or OSHA's substance specific standards, if used with those substances.

Maximum Use Concentration (MUC)

- The maximum atmospheric concentration of a hazardous substance from which an employee can be expected to be protected when wearing a respirator, and is determined by the **assigned protection factor** of the respirator or class of respirators and the **exposure limit** of the hazardous substance
- ***MUC = APF x OSHA Exposure Limit¹***

¹ When no OSHA exposure limit is available for a hazardous substance, the employer must determine an MUC on the basis of relevant available information and informed professional judgment.

Maximum Use Concentration (MUC)

-  Must select a respirator that maintains exposure to the hazardous substance, when measured outside the respirator, at or below the MUC
-  Must not apply MUCs to conditions that are IDLH; instead must use respirators listed for IDLH conditions per paragraph (d)(2)
-  When the calculated MUC exceeds the IDLH level for a hazardous substance, or the performance limits of the cartridge or canister, then employers must set the maximum MUC at that lower limit
-  Must select a respirator appropriate for the chemical state and physical form of the contaminant

Maximum Use Concentration

Example

What is the MUC for an employee wearing a half-mask air purifying respirator (APF=10) in an atmosphere of sulfur dioxide gas (PEL=5 ppm)?

$$\mathbf{MUC = APF \times OSHA \text{ Exposure Limit}}$$

$$\text{MUC} = 10 \times 5 \text{ ppm} = 50 \text{ ppm}$$

Note that this calculated value does not exceed the IDLH level for sulfur dioxide (100 ppm), so that the MUC for this example would be 50 ppm.

End-of-Service-Life Indicator (ESLI)

A system that warns the user of the approach of the **end of adequate respiratory protection**; e.g., the sorbent is approaching saturation or is no longer effective.



Respirators for Atmospheres Not IDLH Gases and Vapors

- ✎ Atmosphere-supplying respirator, or
- ✎ Air-purifying respirator, provided that:
 - 👤 respirator is equipped with an **end-of-service-life indicator (ESLI)** certified by NIOSH for the contaminant; or
 - 👤 if there is no ESLI appropriate for conditions in the workplace, employer implements a **change schedule** for canisters and cartridges based on objective information or data that will ensure that they are changed before the end of their service life
 - 📄 employer must describe the information and data relied upon and basis for the change schedule and reliance on the data

NIOSH Respirator Certification Requirements

42 CFR Part 84

- ✎ On July 10, 1995, 30 CFR 11 (“Part 11”) was replaced by 42 CFR 84 (“Part 84”)
- ✎ Only certifications of **nonpowered, air-purifying, particulate-filter respirators** are affected by this change
- ✎ Remaining portions of Part 11 were incorporated into Part 84 without change

Classes of Nonpowered Air-Purifying Particulate Filters

Nine classes: three levels of filter efficiency, each with three categories of resistance to filter efficiency degradation due to the presence of oil aerosols

<u>N</u>	<u>R</u>	<u>P</u>
100	100	100
99	99	99
95	95	95

N for *Not* resistant to oil

R for *Resistant* to oil

P for oil *Proof*

Selection and Use

- ✎ If no oil particles are present, use any series (N, R, or P)
- ✎ If oil particles are present, use **only** R or P series
- ✎ Follow the respirator filter manufacturer's service-time-limit recommendations

High Efficiency Filters

Filter that is at least 99.97% efficient in removing monodisperse particles of 0.3 micrometers in diameter.
(HEPA filter per NIOSH 30 CFR 11)



Equivalent NIOSH 42 CFR 84 particulate filters are the N100, R100, and P100 filters.



Respirators for Atmospheres Not IDLH (cont'd)

Particulates

- ✎ Atmosphere-supplying respirator; or
- ✎ Air-purifying respirator equipped with HEPA filters certified by NIOSH under 30 CFR Part 11 or with filters certified for particulates under 42 CFR Part 84; or
- 🚰 Air-purifying respirator equipped with any filter certified for particulates by NIOSH for contaminants consisting primarily of particles with mass median aerodynamic diameters of at least 2 micrometers

Physician or Other Licensed Health Care Professional (PLHCP)

An individual whose legally permitted scope of practice (i.e., license, registration, or certification) allows him/her to independently provide, or be delegated the responsibility to provide, some or all of the health care services required by paragraph (e), *Medical evaluation*.

Medical Evaluation Procedures

-  Must provide a medical evaluation to determine employee's ability to use a respirator, **before fit testing and use**
-  Must identify a PLHCP to perform medical evaluations using a medical questionnaire or an initial medical examination that obtains the same information
-  Medical evaluation must obtain the information requested by the questionnaire in Sections 1 and 2, Part A of App. C
-  Follow-up medical examination is required for an employee who gives a positive response to any question among questions 1 through 8 in Section 2, Part A of App. C or whose initial medical examination demonstrates the need for a follow-up medical examination


Medical Evaluation

Additional Medical Evaluations

- ✎ **Annual review** of medical status is **not required**
- ✎ At a minimum, employer must provide additional medical evaluations if:
 - ⊕ Employee reports medical signs or symptoms related to the ability to use a respirator
 - ⊕ PLHCP, supervisor, or program administrator informs the employer that an employee needs to be reevaluated
 - ⊕ Information from the respirator program, including observations made during fit testing and program evaluation, indicates a need
 - ⊕ Change occurs in workplace conditions that may substantially increase the physiological burden on an employee

Fit Testing

Before an employee uses any respirator with a **negative or positive pressure tight-fitting facepiece**, the employee must be fit tested with the same make, model, style, and size of respirator that will be used.

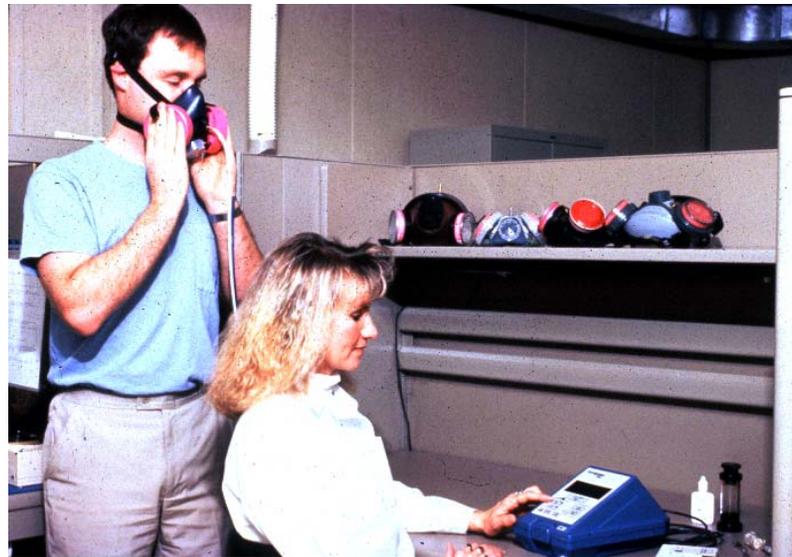

Qualitative Fit Test (QLFT)

A pass/fail fit test to assess the adequacy of respirator fit that relies on the individual's response to the test agent.



Quantitative Fit Test (QNFT)

An assessment of the adequacy of respirator fit by numerically measuring the amount of leakage into the respirator.



Fit Testing (cont'd)

- ✎ Employees using tight-fitting facepiece respirators must pass an appropriate qualitative fit test (QLFT) or quantitative fit test (QNFT):
 - 👤 prior to initial use,
 - 👤 whenever a different respirator facepiece (size, style, model or make) is used, and
 - 👤 at least annually thereafter
- ✎ Must conduct an additional fit test whenever the employee reports, or the employer or PLHCP makes visual observations of, changes in the employee's physical condition (e.g., facial scarring, dental changes, cosmetic surgery, or obvious change in body weight) that could affect respirator fit

Fit Testing (cont'd)

 The fit test must be administered using an OSHA-accepted QLFT or QNFT protocol contained in Appendix A

QLFT Protocols:

 Isoamyl acetate

 Saccharin

 Bitrex

 Irritant smoke

QNFT Protocols:

 Generated Aerosol (corn oil, salt, DEHP)

 Condensation Nuclei Counter (PortaCount)

 Controlled Negative Pressure (Dynatech FitTester 3000)

 Controlled Negative Pressure (CNP) REDON

Fit Factor

A quantitative estimate of the fit of a particular respirator to a specific individual, and typically estimates the ratio:

$$\frac{\text{Concentration of a substance in ambient air}}{\text{Concentration inside the respirator when worn}}$$

Fit Testing (cont'd)

-  QLFT may only be used to fit test negative pressure APRs that must achieve a fit factor or 100 or less
-  If the fit factor is determined to be equal to or greater than 100 for tight-fitting half facepieces or equal to or greater than 500 for tight-fitting full facepieces, the QNFT has been passed with that respirator


Use of Respirators

Facepiece Seal Protection

- ✎ Respirators with tight-fitting facepieces must not be worn by employees who have facial hair or any condition that interferes with the face-to-facepiece seal or valve function
- ✎ Corrective glasses or goggles or other PPE must be worn in a manner that does not interfere with the face-to-facepiece seal
- ✎ Employees wearing tight-fitting respirators must perform a user seal check **each time they put on the respirator** using the procedures in Appendix B-1 or equally effective manufacturer's procedures

User Seal Check

An action conducted by the respirator user to determine if the respirator is properly seated to the face.

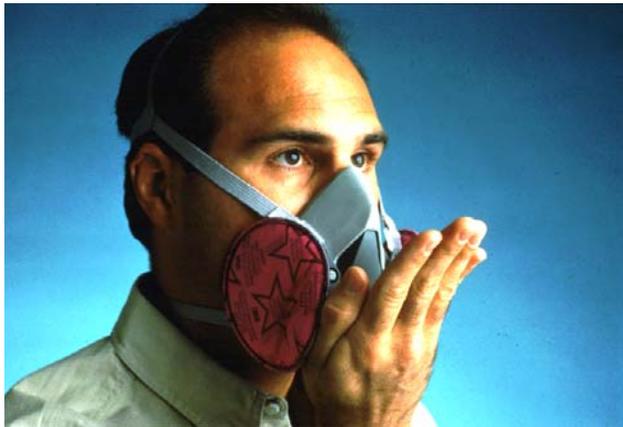

Positive Pressure Check



Negative Pressure Check

Use of Respirators

Continuing Respirator Effectiveness

-  Maintain appropriate surveillance of work area conditions and degree of exposure or stress; reevaluate the respirator's effectiveness when it may be affected by changes in these
-  Employees must leave the respirator use area:
 -  to wash their faces and respirator facepieces as necessary
 -  if they detect vapor or gas breakthrough, changes in breathing resistance, or leakage of the facepiece
 -  to replace the respirator or filter, cartridge, or canister
-  If employee detects vapor or gas breakthrough, changes in breathing resistance, or leakage of the facepiece, employer must replace or repair the respirator before allowing employee to return to the work area

Use of Respirators

Procedures for IDLH Atmospheres

-  One employee or, when needed, more than one employee must be located outside the IDLH atmosphere
-  Visual, voice, or signal line communication must be maintained between employees inside and outside
-  Employees located outside must be trained and equipped to provide effective emergency rescue
-  Employer or authorized designee must be notified before any employee outside the IDLH atmosphere enters to provide emergency rescue
-  Employer or authorized designee, once notified, must provide necessary assistance appropriate to the situation

Use of Respirators

Procedures for IDLH Atmospheres (cont'd)

-  Employees located outside the IDLH atmosphere must be equipped with:
 -  a pressure demand or other positive pressure SCBA or SAR with auxiliary SCBA; and either
 -  appropriate retrieval equipment for removing employees who enter, where retrieval equipment would contribute to the rescue of employees and would not increase the overall risk resulting from entry; or
 -  equivalent means for rescue where retrieval equipment is not required per above

Use of Respirators


Procedures for Interior Structural Firefighting

In addition to the procedures for respirator use in IDLH atmospheres, in interior structural fires:

- ✎ At least two employees must enter and remain in visual or voice contact with one another at all times
- ✎ At least two employees must be located outside
- ✎ All employees engaged in interior structural firefighting must use SCBAs
- ✎ One employee located outside may be assigned an additional role (e.g., incident commander), so long as this doesn't interfere with their assistance or rescue activities
- ✎ This standard does not preclude firefighters from performing emergency rescue before an entire team has assembled

Maintenance and Care

- ✎ Provide each user with a respirator that is clean, sanitary and in good working order
- ✎ Use procedures in Appendix B-2 or equivalent manufacturer's recommendations
- ✎ Clean and disinfect at the following intervals:
 - 👤 as often as necessary when issued for exclusive use
 - 👤 before being worn by different individuals when issued to more than one employee
 - 👤 after each use for emergency respirators and those used in fit testing and training

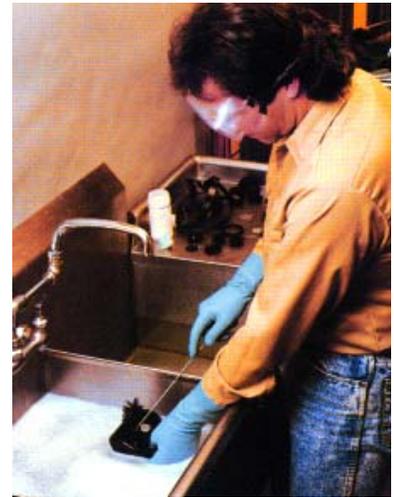

Breathing Air Quality and Use

-  Compressed breathing air must meet at least the requirements for Type 1 - Grade D breathing air described in ANSI/CGA G-7.1-1989:
 -  Oxygen content (v/v) of 19.5 - 23.5%
 -  Hydrocarbon (condensed) content of 5 milligrams per cubic meter (mg/m³) of air or less
 -  CO content of 10 parts per million (ppm) or less
 -  CO₂ content of 1,000 ppm or less
 -  Lack of noticeable odor
-  Compressors supplying breathing air to respirators must be equipped with suitable in-line air-purifying sorbent beds and filters that are maintained and replaced or refurbished per manufacturer's instructions

Breathing Air Quality and Use (cont'd)

- ✎ For compressors not oil lubricated, CO levels in the breathing air must not exceed 10 ppm
- ✎ For oil-lubricated compressors, a high-temperature or CO alarm, or both, must be used to monitor CO levels
 - ⊕ if only high-temperature alarms are used, the air supply must be monitored at sufficient intervals to prevent CO levels from exceeding 10 ppm

Identification of Filters, Cartridges, and Canisters

- ✎ All filters, cartridges and canisters used in the workplace must be labeled and color coded with the NIOSH approval label
- ✎ The label must not be removed and must remain legible
- ✎ “TC number” is no longer on cartridges or filters (Part 84)
- ✎ Marked with “NIOSH”, manufacturer’s name and part number, and an abbreviation to indicate cartridge or filter type (e.g., N95, P100, etc.)
- ✎ Matrix approval label supplied, usually as insert in box



Training and Information

Employers must provide effective training to employees who are required to use respirators.



Training and Information

-  Employees who are required to use respirators must be trained such that they can demonstrate knowledge of at least:
 -  why the respirator is necessary and how improper fit, use, or maintenance can compromise its protective effect
 -  limitations and capabilities of the respirator
 -  effective use in emergency situations
 -  how to inspect, put on and remove, use and check the seals
 -  maintenance and storage
 -  recognition of medical signs and symptoms that may limit or prevent effective use
 -  general requirements of this standard

Training and Information (cont'd)

- ✎ Training must be provided prior to use, unless acceptable training has been provided by another employer within the past 12 months
- ✎ Retraining is required annually, and when:
 - ⊕ changes in the workplace or type of respirator render previous training obsolete
 - ⊕ there are inadequacies in the employee's knowledge or use
 - ⊕ any other situation arises in which retraining appears necessary
- ✎ The basic advisory information in Appendix D must be provided to employees who wear respirators when use is not required by this standard or by the employer

Program Evaluation

- ✎ Must conduct evaluations of the workplace as necessary to ensure effective implementation of the program
- ✎ Must regularly consult employees required to use respirators to assess their views on program effectiveness and to identify and correct any problems
 - 👤 factors to be assessed include, but are not limited to:
 - 📋 respirator fit (including effect on workplace performance)
 - 📋 appropriate selection
 - 📋 proper use
 - 📋 proper maintenance

Recordkeeping

-  Records of medical evaluations must be retained and made available per 29 CFR 1910.1020
-  A record of fit tests must be established and retained until the next fit test is administered
-  A written copy of the current program must be retained
-  Written materials required to be retained must be made available upon request to affected employees and OSHA